




"Unlock innovation: Over 20 Years of Excellence in First-Class Push Button Solutions with XIDER!"

DB2 Series Push button switch

100%

Silver contacts

To Achieve High Quality Buttons

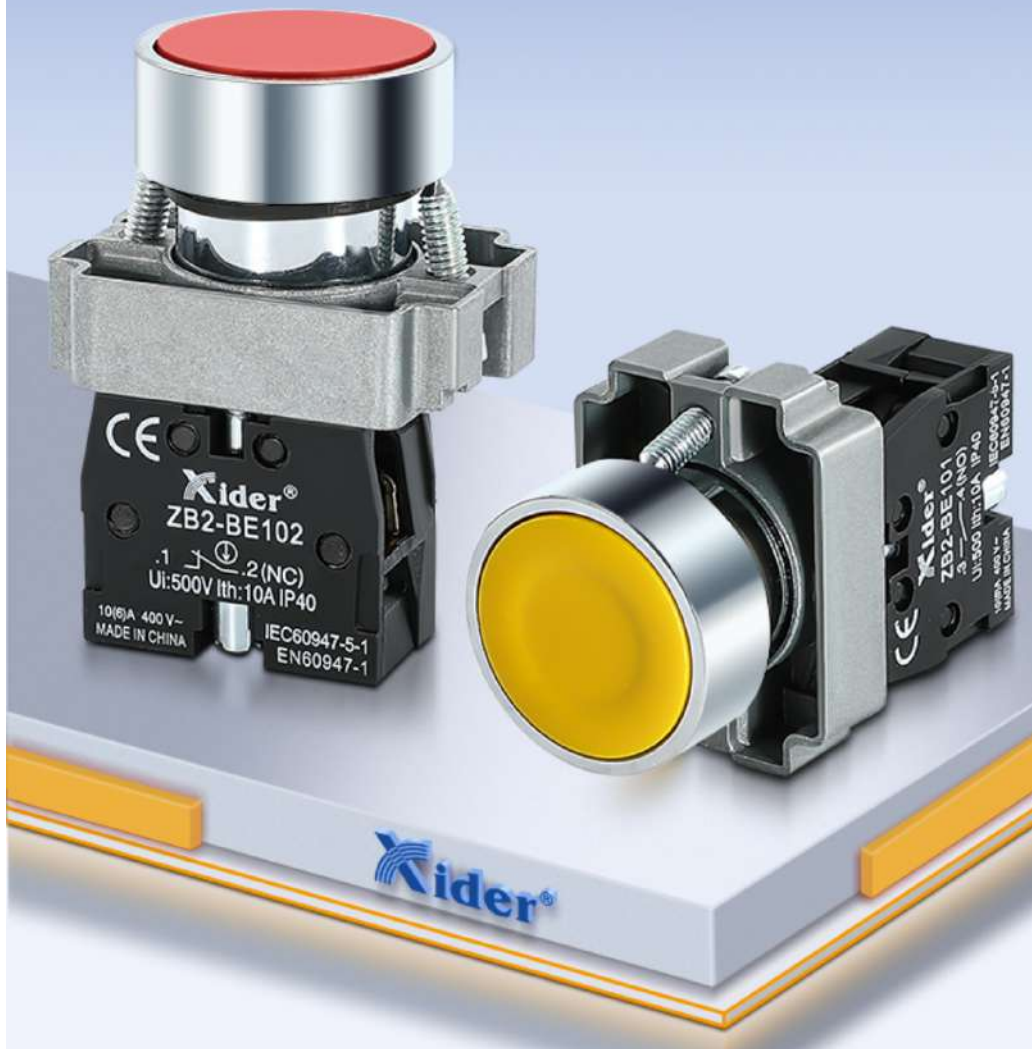

Contact sensitivity



Low power consumption



Complete specifications



Exquisite workmanship



Flame retardant



Factory direct sales

Detail comparison

Low power consumption



Silver contact are efficient and stable with 10A high current

"Featuring touch sensitivity, reliable performance, excellent conductivity, an expansive contact area, and an extended lifespan with anti-aging properties."

- Green is normally open contact
- Red is normally closed contact



Detail comparison

Low power consumption



Silver contact are efficient and stable with 10A high current

"Featuring touch sensitivity, reliable performance, excellent conductivity, an expansive contact area, and an extended lifespan with anti-aging properties."

- Green is normally open contact
- Red is normally closed contact



≥1000.000

times mechanical life

≥50000

times electric life

IP65

Water-proof grade

Quality upgrade

Low power consumption

Thickened frosted button head

Thickened Aluminum alloy metal cap

Zinc alloy center plate

Built-in silver contact



IP65 Waterproof

waterproof in front of panel



Waterproof seal ring



Multiple colors available

Red, yellow, blue green, black and white colors.



Red Yellow Green
White Black blue

Product parameter



Product parameter



Mounting hole size : 22mm

Electrical life : $\geq 50,000$ times

Switch value: 10A/400VAC

Contact Resistance: $\leq 50\text{m}\Omega$

Contact configuration: NO NC

Operation type: Momentary/Latching

Crust material: Engineering plastics

Protection grade: IP65

Terminal type: Screw terminal

Operation temperature: $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$

Contact type	Default state	Press the state
 1NO 1NC	 OFF   ON 	 ON   OFF 
 1NO	 OFF 	 ON 
 1NC	 ON 	 OFF 

Crust material: Engineering plastics Protection grade: IP65

Terminal type: Screw terminal

Operation temperature: -25°C~+65°C


Contact type	Default state	Press the state
 1NO 1NC	OFF  ON 	ON  OFF 
 1NO	OFF 	ON 
 1NC	ON 	OFF 

WIRING DIAGRAM

Single normal open/single normal close



Two normal open or two normal close

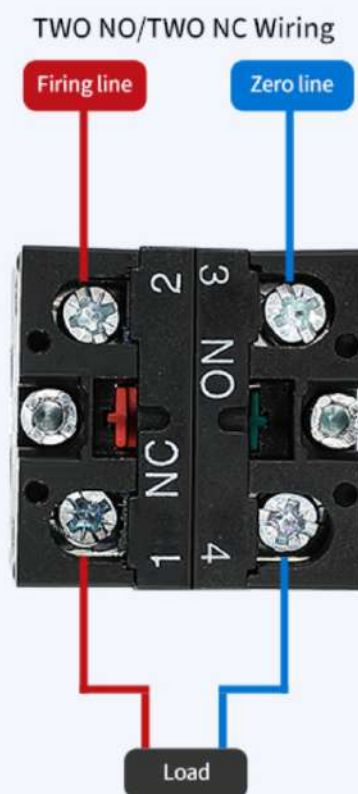



Manufacturer display



Strict and Effective Quality Assurance System



Excellent R&D Design Technical Team



Perfect After-Sales Service Guarantee



Factory Show 1



Factory Show 2



Factory Show 3



Factory Show 4




Factory Show 5




Factory Show 6

图片需要提供



Factory Show 7



Factory Show 8

Xider®

Package display

Packaging display 1



Packaging display 2



Packaging display 3



Packaging display 3



Packaging display 4



Packaging display 2



Packaging display 3



Packaging display 3



Packaging display 4



Actural Application

